



**High Pressure Fuel Air Separator
with Positive Fuel Air Separation System**

**INSTALLATION MANUAL
For DETROIT SERIES 60 ENGINES
Model Years 1987-2002**



**PLEASE READ
THESE INSTRUCTIONS
THOROUGHLY
BEFORE BEGINNING
INSTALLATION**



Part No. A6HSDE630



Proudly Made in the USA

**www.airdogdiesel.com
1-573-635-0555 or
1-877-463-4373**

Providing "Test Cell Performance" in "Real World Conditions" Since 1993

PATENT

www.AirDogDiesel.com/patents

Revised 5/06/2024



HEAVY DUTY & INDUSTRIAL
Fuel Systems
by **PureFlow**[™]
Technologies, Inc.

Amazingly Simple Installation

Mounts on frame and connects between the engine transfer (fuel) pump and engine. Air/Vapor return line connects to engine fuel return line.

Amazingly Simple Operation

Operates in conjunction with the fuel flow and pressure created by the engine's transfer pump. Separates and removes entrained air plus vapor from fuel pump cavitation before the fuel enters the engine.

The AirDog[®] Champ is proudly made in the USA and features a 4 year limited warranty.



With Pureflow Technologies AirDog[®] Champ system installed, your diesel engine can perform as designed, even under the most extreme conditions.

877-GO-DIESEL (877-463-4373)
airdogdiesel.com

- ◆ Improves Fuel Mileage
- ◆ Lengthens Injector Life
- ◆ Smoother Idle
- ◆ Improves Throttle Response
- ◆ Maximizes Torque
- ◆ Reduces Emissions



Proudly made in the USA

TABLE OF CONTENTS

Section 1.....Table of Contents
 Section 2.....Installation and Safety Guidelines
 Section 3.....Parts List
 Section 4.....System Overview

INSTALLATION PROCEDURES

Section 5.....Mounting the AirDog® Champ

FUEL LINES & FITTINGS

Section 6A.....From AirDog® Champ to Engine
 Section 6B.....From Transfer Pump to AirDog® Champ
 Section 6C.....Air/Vapor Return to Tank

MAINTENANCE

Section 7.....Filter Service

Optional Kits Available



PN FLK-CHP Champ Fuel Line Kit

This kit contains all components most commonly needed when installing the Champ frame mount air separation system using #8 fittings and Eaton Weatherhead supply lines. This kit uses #6 air and vapor return lines and includes 8' of 1/2" general purpose high pressure hose to be cut into 2 pieces for the fuel supply running from the pump or secondary filter head/housing, if equipped with one, into the Champ and for the supply running out of the Champ to the head or fuel rail. 7' of low pressure line is also included for the air and vapor return line.



PN UPG-DEFS Detroit Upgrade Kit

The Detroit Series 60 engine utilizes "FOR SEAL" fittings with steel lines on the high pressure side of the transfer pump. These fittings have small passageways and are restrictive to the fuel flow to the engine. To maximize the efficiency of the engine, it is necessary to replace the original restrictive fuel fittings and lines with larger and less restrictive fittings and lines. These fittings and #8 DOT approved fuel lines are supplied with the AirDog® installation kit.

INSTALLATION GUIDELINES

The installation of your AirDog® Champ can be made relatively easy by following the steps outlined in this manual, and:

1. Inventory the package components. Notify PureFlow Technologies immediately of any missing or damaged parts.
2. Read the installation manual completely. Understand how the system operates and the installation recommendations before beginning.
3. Proper location of the AirDog® Champ on the vehicle is essential. Consider hazards presented to the equipment by road debris and the elements.
4. Follow the installation recommendations and guidelines contained herein, but please note that individual installations may vary.

SAFETY GUIDELINES

CAUTION: Chock the vehicle's tires to prevent rolling.

CAUTION: Wear safety glasses when operating power tools, such as drills and grinders, or when using a punch or chisel.



CAUTION: Do not drill into or weld the top of the frame rail or within 1-½" of the frame rail flange on the side of the frame rail.

CAUTION: Route the fuel lines and electrical harnesses, keeping them away from hot exhaust components and/or moving parts. Properly secure the fuel lines and electrical harnesses to prevent chafing.



If you are uncertain of any installation procedure, please call PureFlow® Technologies, Inc. at 573-635-0555 for technical assistance.

NOTE: The pictures used in this manual are for example only and may not depict the exact components as found on your truck.





Installation Parts List

QTY	Description	Part Number	Image
1	Installation Manual	206-6-0630	
1 1	AirDog® Champ High Pressure Air Separator AirDog Fuel Filter	A6HS-WIP FF200-MG-6	



908-00-0304 Frame Mount Kit

2	Mounting Bracket	002-3C-0003 002-3C-0004	
1	901-08-0100 Hardware Kit Includes: 4 ea 3/8-16 x 1-1/4 HHCS 4 ea 3/8-16 Hex Nut 4 ea 3/8 Split Lock Washer 4 ea 1/4-20 x 2 SHCS 4 ea 1/4 Split Lock Washer 4 ea 1/4-20 Hex Nut	1J-1-C20SZ 1S-1-CSZ 1R-6-CSZ 1L-A32C 1R-6-AC 1S-1-AC	

CHPFK-630-PB Installation Kit

960-06-0560 Basic Champ Fitting Kit			
2	#8M JIC x 1/2 M ORB Straight Connector	4A-1-02-08-08-S	
1	#6M JIC x 3/8 M ORB Straight Connector	4A-1-01-06-06-S	
960-06-0630-FK Detroit 87-02 Fitting Kit			
1	#6M JIC x 1/4 M NPTF Straight Connector	4A-1-01-A-C-SZ	
1	#8M JIC x #8F JICX x 1/4 NPTF Port GagePort	4A-1-11-08-08-4P	

SBK- 1 000 Sandwich Bracket Kit

OPTIONAL	1	Sandwich Mounting Bracket Kit for AirDog® & Champ Includes: 1 Front Bracket (002-3C-0010-SBF), 1 Back Bracket (002-3C-0011-SBB), & 1 Universal Bracket (002-3C-0006PCB)	908-00-8888	
	1	901-08-0100-SB Hardware Kit Includes: 4 ea 3/8-16 x 1 FHSCS 3 ea 3/8-16 x 3-1/2 HHCS 3 each 3/8-16 x 4-1/2 HHCS 7 ea 3/8-16 Hex Nut 7 ea 3/8 Split Lock Washer	1M-C16SZ 1J-1-C56SZ 1J-1-C72SZ 1S-1-CSZ 1R-6-CSZ	


See page 3 for additional fuel line kit available.




SYSTEM OVERVIEW

Welcome to the AirDog® Champ
High Pressure Fuel Air Separation System for Class 8 Trucks


The AirDog® Champ with *ADVANCED FUEL AIR SEPARATION* is a premium fuel air separator for the Detroit Series 60 Engine (Model Years 1987-2002).

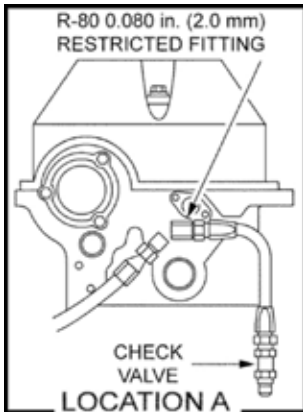

The AirDog® Champ is installed between the engine transfer pump or secondary fuel filter and the engine fuel rail, to remove virtually all entrained air and vapor from the fuel flow to the engine. Additionally, the engine rail pressure must be set correctly to completely fill the injector barrel. Please consult your DDEC Manual for your engine for correct (rail) fuel pressure settings.

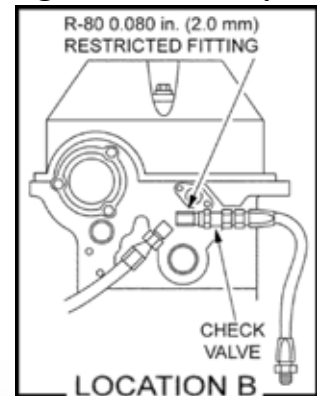


TYPICAL INSTALLATION LAYOUT

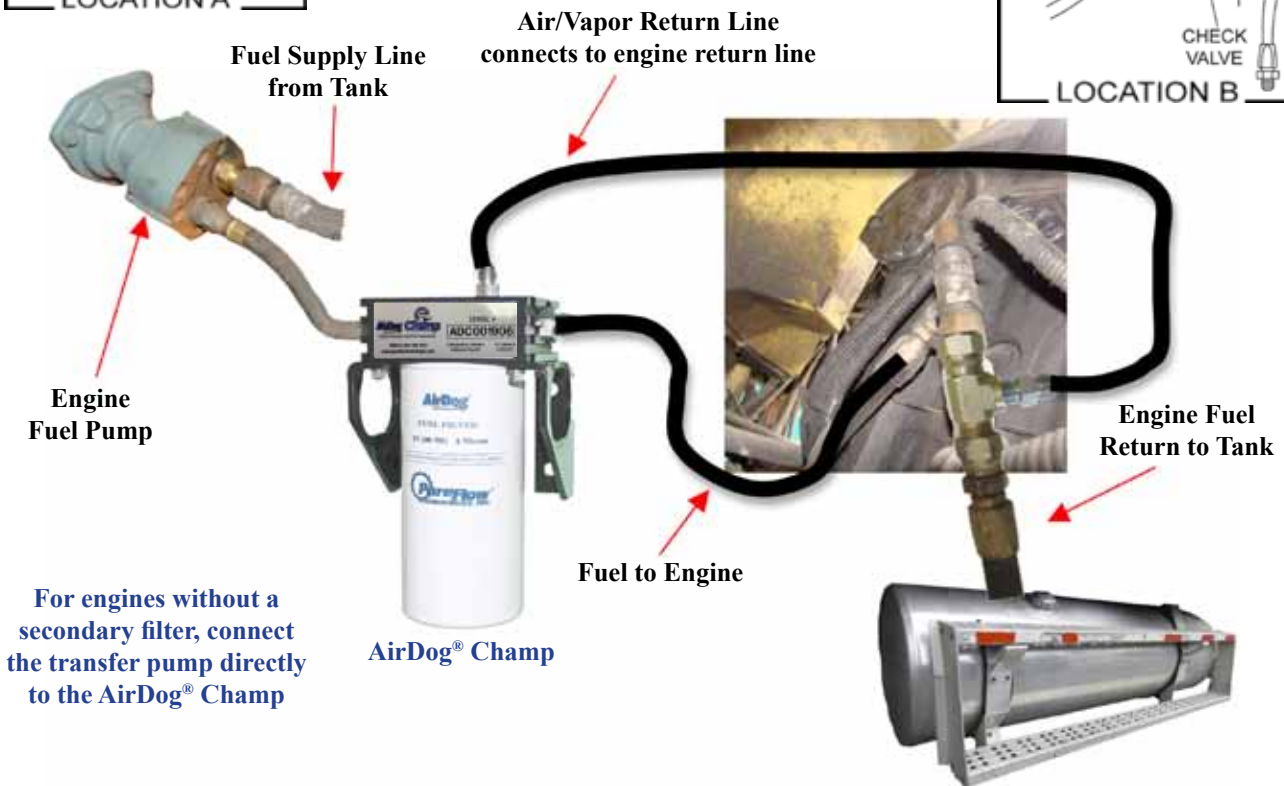


OPTIONAL KIT AVAILABLE (PN: SBK-1000)

Mounting the Champ to the Frame without Drilling


Determine which holes in bracket 1 that you are going to need by holding it up to the frame of your vehicle.

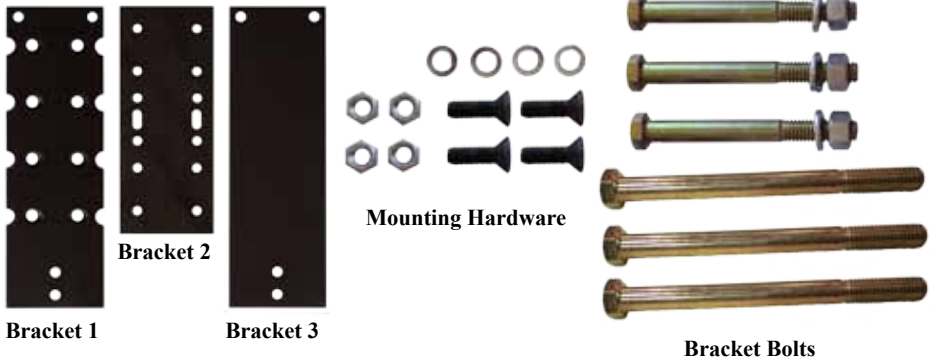

Use mounting hardware to mount bracket 1 to bracket 2. The position of bracket 2 can be adjusted vertically and horizontally to suit your particular needs.

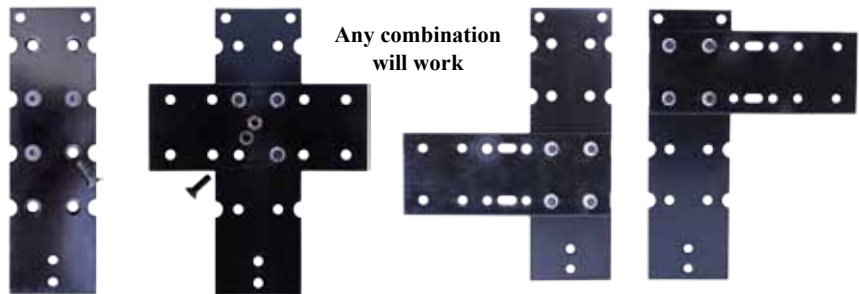


Using product mounting hardware, mount product to brackets.

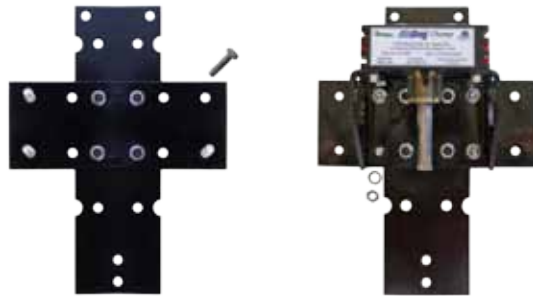

Install 2 of the frame bracket bolts on top of bracket 1 and bracket 3. Slide over frame and install bottom bolt.

Note: 3.5" and 4.5" bolts are included. Use the length best suited to your vehicle's frame width.

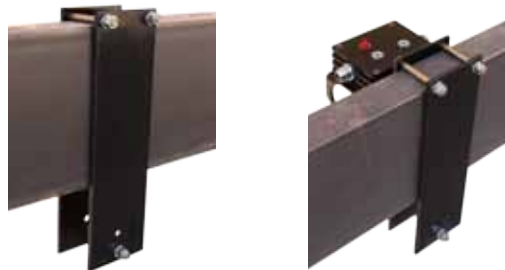

Tighten bolts as needed.
Install filter.



Mounting the Champ to the Frame by Drilling

Selecting the best location to mount the AirDog® Champ.

Installing the AirDog® Champ at the proper location on the vehicle is most important. When deciding where to locate the AirDog®, the following points should be considered:

- Best relationship to the secondary fuel filter and back of engine head.
- Protection from the elements and road debris.
- Accessibility for service.

Figures 2 and 3 depict the AirDog® Champ mounted on the frame. There are many variations in the arrangements of the components on the various trucks. With a little ingenuity, the AirDog® Champ can be easily installed on any Class 8 truck.



Figure 2



Figure 3

5-1. Hold the AirDog® Champ, with the brackets and filter attached, next to the frame at the selected mounting location. Check for clearance. If mounted between the frame and steer tire, turn the steering wheel fully to the left and right to check for tire clearance.



Figure 4



Figure 5



5-2. Mark and center punch the hole locations. Drill a 3/8" hole at each of the 4 locations and attach the AirDog® Champ brackets.

WARNING! DO NOT DRILL INTO OR DAMAGE ANY WIRING, AIR LINES OR OTHER COMPONENTS LOCATED BEHIND THE FRAME RAIL.

**FUEL LINE NOT INCLUDED - SEE PAGE 3 FOR AVAILABLE FUEL LINE KIT
- USING THIS OPTIONAL COST EFFECTIVE KIT WILL MAKE
INSTALLATION EASIER AND MORE EFFICIENT.**

Section 6A: Installing the Fuel Lines and Fittings

PERFORMANCE OPTIMIZATION SUGGESTIONS

Figure 6 shows a situation where the fuel line to the engine has had a tee installed to accommodate a temperature sensor. The problem in Figure 6 is that the flow to the head is unnecessarily restricted by the tee and 90° bend, creating a performance loss. Over time, this can cause a considerable increase in fuel cost as well as power loss.



Figure 6



Figure 7



Figure 7 shows a Detroit Series 60 fuel pump with a #10 supply line coming in from the tank and a straight #8 line going to the head. We recommend installing a tee, such as the one shown, to accommodate the temperature sensor and eliminate unnecessary restriction and resulting degradation to engine efficiency.

INSTALLING THE CHAMP FUEL FITTINGS

6A-1. Install fittings in the AirDog® Champ:

- A** #8 M JIC x 1/2" M ORB (PN 4A-1-02-08-08-S) "FUEL IN"
- B** #6 M JIC x 3/8" M ORB (PN 4A-1-01-06-06-S) "AIR RETURN"
- C** #8 M JIC x 1/2" M ORB (PN 4A-1-02-08-08-S) "FUEL OUT"



Figure 8

FUEL LINE FROM AIRDOG® CHAMP TO ENGINE

6A-2. Disconnect the #8 fuel line from the engine transfer pump (Fig. 9). Re-route the fuel line and connect it to the Champ, "FUEL OUT" to Engine, port "C", if possible. If not, it may be necessary to make a new fuel line.



Figure 9



Figure 10

Route fuel line from here to here



Figure 11

6A-3. If the engine is equipped with an optional secondary fuel filter, disconnect the #8 fuel line (that goes to the engine) from the secondary fuel filter and re-connect it to the AirDog® Champ "FUEL OUT" port.

Section 6

Fuel Lines & Fittings

Section 6B: Fuel Line from Transfer Pump to AirDog® Champ

6B-1. Measure, cut, and assemble a new #8 fuel line, as necessary, to connect the engine transfer (fuel pump) to the AirDog® Champ.

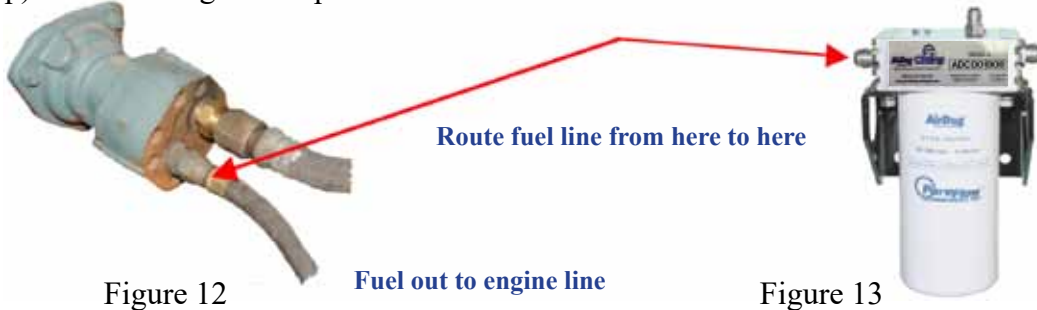


Figure 12

Fuel out to engine line

Figure 13

6B-2. If the engine is equipped with a secondary fuel filter, measure, cut, and assemble a new #8 fuel line to connect the secondary fuel filter to the AirDog® Champ.

Section 6C: Air/Vapor Return to Tank

6C-1. Disconnect the ENGINE fuel return line from the check valve at the back of the engine head.

6C-2. Assemble the AirDog® Champ special return tee (PN 4A-1-01-A-C-SZ & PN 4A-1-11-08-08-4P) (Fig. 15), and install it on the outlet side of the Detroit check valve. Reconnect the original engine return line to the check valve.



Figure 14



Figure 15



Figure 16

6C-3. Measure, cut, and assemble a #6 air/vapor return line and connect the Champ air/vapor return port to the special return tee just installed.

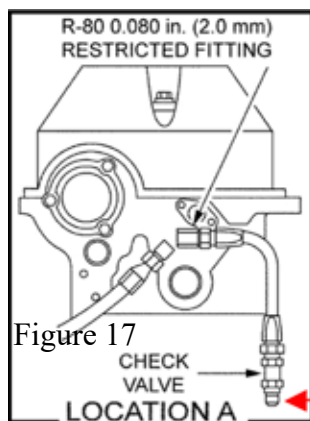


Figure 17



Figure 18

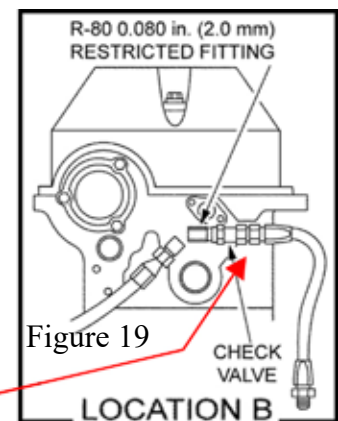


Figure 19

Install the Champ Return Tee AFTER the Engine Return Check Valve



Figure 20

Route fuel line from here to here



Figure 21

Servicing the AirDog® Champ Fuel Filter

The AirDog® fuel filters have a typical lifespan of 25,000+ miles, and up to 40,000 miles, as they are made with a high-quality and high-capacity Micro-Glass media, as opposed to a paper element, and filter life is affected by many variables. In any case, we do not recommend exceeding 40,000 miles of service with a fuel filter. It is recommended that you keep a replacement AirDog® fuel filter on-hand, ready for replacement. When replacing the fuel filter, be sure to clean the under side of the Champ base. Rub clean diesel fuel or oil on filter seal before installing to ensure a proper seal. Follow the instructions on the filter for proper tightening procedures.



**Built in check valve
Prevents fuel from
draining from the engine
head during filter changes.**

**AirDog® Champ
Fuel Filter
6 Micron Micro-Glass**

Figure 22

NOTE: Due to the fact that fuel filters are often OVER TIGHTENED and difficult to remove, it is suggested to carry a second filter wrench to use as a backup wrench when changing the fuel filter.

Dispose of waste fuel and used filters properly to protect our environment.



www.airdogdiesel.com
1-877-463-4373 or
1-573-635-0555

Copyright© 2016
CD Patents, LLC

Bulletin No. 206-6-0630
Revised May 06,2024

All Rights Reserved